

Paglight Kits incorporating Pagbelt NMH.

Paglight Kits are designed to provide everything required for a lighting source that can be used either on or off camera.

The Paglight incorporates a standard halogen lamp holder and a choice of 2 bi-pin halogen lamps (20W, 35W, 50W, 75W or 100W). The light is fitted with a professional accessory holder that includes a daylight filter, a diffuser and two parallel barn doors. A handle is included for off-camera use. A stud adaptor and a camera shoe plate are included for mounting the light to the camera. The XLR-4 Power Base enables the Paglight to be powered from the battery belt supplied.

The **Pagbelt NMH** battery belt is a 10Ah power source, available in 12V or 13.2V formats, ideal for powering lights of up to 100W. It incorporates an integral overnight charger.

Paglight Kits are supplied in a fitted flight case and comprise:

- > Paglight (12V).
- > XLR-4 Power Base (lead length 1.5m).
- > Standard Lamp Holder
- > A choice of 2 lamps (20W, 35W, 50W, 75W or 100W).
- > Rotatable Accessory Kit comprising: 1 accessory ring, 1 pair of parallel barn doors, 1 dichroic filter and 1 diffuser.
- > Pagbelt NMH with integral overnight charger and a power lead suitable for country of use (not shown). There is a choice of 12V or 13.2V 10Ah Pagbelts.
- > Handle.
- > Camera shoe plate 1/4" Whit.
- > Stud adaptor 1/4" Whit.



Paglight PowerArc Field Kit.

Paglight PowerArc Field Kit incorporates the PAG PowerArc HMI unit and two standard halogen units, enabling you to take full advantage of the unique plug-in lamp holder system that makes Paglight the industry's most versatile camera light. Converting the Paglight from halogen to Arc takes a matter of seconds.

The kit is tailored to your requirements with a choice of Power Base, suitable for the light output on most cameras (PP90, D-Tap or XLR-4), and a choice of two halogen lamps (20W, 35W, 50W, 75W or 100W).


The light is fitted with a rotatable accessory holder that includes a daylight filter, a diffuser and two parallel barn doors. A dichroic filter that converts the light output to match halogen is included for use with the PowerArc.

A stud adaptor and a camera shoe plate are included for mounting the light to the camera. A Camera Clamp is included for mounting the Paglight to a camera handle, or off-camera. A handle is included for handheld use.

The components are housed in a strong, lightweight and compact fitted flight case.

The Paglight PowerArc Field Kit comprises:

- A** Paglight 12V.
- B** Choice of Power Base (PP90, D-Tap or XLR-4).
- C** Standard lamp holder (with choice of lamp 20W, 35W, 50W, 75W or 100W).
- D** Standard lamp holder and protector (with choice of lamp).
- E** PowerArc Unit and protector (with arc lamp).
- F** Rotatable Accessory Kit comprising: accessory holder, 1 pair of parallel barn doors, 1 dichroic filter and 1 diffuser.
- G** Tapered Barndoors.
- H** PowerArc Conversion Filter.
- I** Handle 1/4" Whit. bush / stud.
- J** Camera Clamp 1/4" Whit. bush.
- K** Camera Shoe Plate 1/4" Whit.
- L** Stud Adaptor 1/4" Whit.
- M** Fitted Flight Case.
- N** Storage space for additional components.

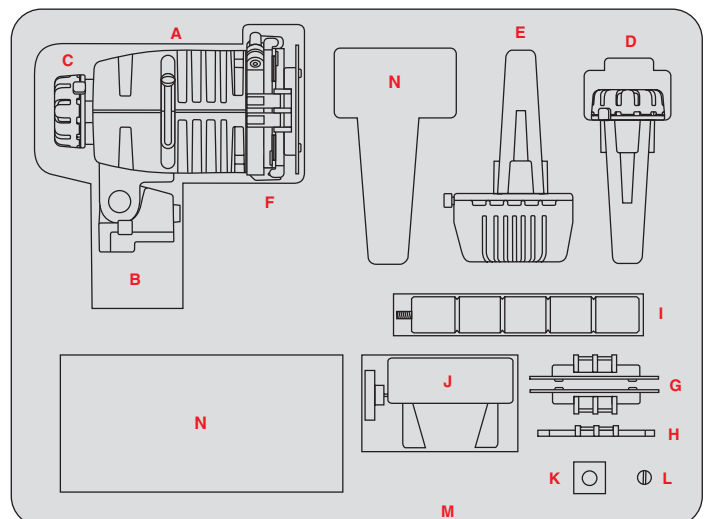

Paglight PowerArc Field Kit

Model	Size	Weight
9825	468 x 386 x 109mm	3kg