

**NEW PRODUCT** DATA SHEET

# Mini PAGlink MPL99G

99Wh GOLD MOUNT MINI LINKING BATTERY



INTERNATIONAL PATENTS APPLY


- All the benefits of PAGlink intelligent linking technology combined with a reduced form factor.
- Incorporates 2 x fixed D-Tap outputs (12V) and 1 x USB (5V 2A) output unit which can be swapped for a Lemo, Hirose or another D-Tap output unit.
- Compatible with full-size Gold Mount camera plates, PAGlink batteries, PAGlink chargers and Anton/Bauer Gold Mount chargers for maximum versatility and economic integration.
- Control the capacity and weight of your power source to suit the application: 1 battery for handheld applications; 2 or more batteries for a 12A current draw or longer run-time.
- Fully-serviceable, modular design that allows authorised replacement of the cell-pack whilst maintaining compliance with UN standards and IATA regulations for flight safety.

## Mini PAGlink gives you all this and more...


- Flight-friendly, 99Wh batteries that can be linked to extend run-time, allowing you to travel with all the power you need.
- Simultaneous discharge from linked batteries, which means no dead weight on your camera.
- An increased current draw, from 10A individually to 12A when batteries are linked, ideal for camera set-ups that require power for multiple accessories.
- Seamless hot-swapping for continuous power, or the ability to add another battery just to keep shooting.
- An extended overall battery life, a 2 year guarantee and a better return on investment because linked batteries share the current load.
- Four 1/4" bush inserts for mounting accessories to individual or linked batteries.
- An accurate numeric display which shows run-time on-load in 1 minute increments, capacity any time in 1% increments, and useful data such as the number of charge/discharge cycles, to assist with battery management.
- Communication with the camera data system that displays capacity in the viewfinder/LCD.
- Efficient, linked battery charging using PAGlink or Anton/Bauer chargers. Up to 8 batteries can be charged simultaneously on each position.
- PAG's unique, patented, battery linking technology, which remains far in advance of any other camera battery system available today.

### MPL99G Battery Specification:

|                 |                                    |
|-----------------|------------------------------------|
| Model No.       | 7241                               |
| Connection:     | Gold Mount / Mini PAGlink G-Mount  |
| Capacity:       | 99 Watt-hours (6.7Ah)              |
| Voltage:        | 14.8V nominal                      |
| Output Current: | 12A when linked / 10A individually |
| Outputs:        | 2 x D-Taps, 1 x USB (5V 2A)        |
| Cells:          | Lithium-Ion                        |
| Weight:         | 590g                               |

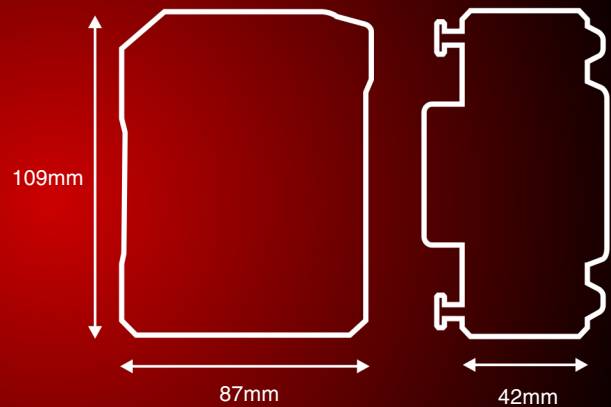

The MPL99G is smaller than the PL94 battery and the two can be linked.

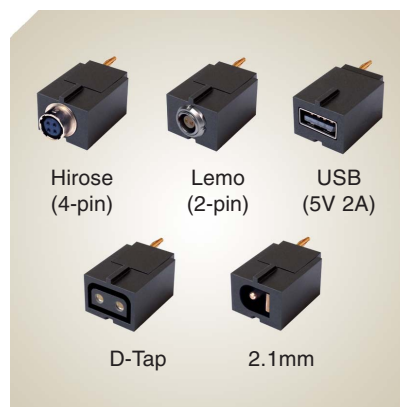

These outputs units are available for use with Mini PAGlink batteries.



New, smaller PAG Mini Gold Mount for smaller cameras.



**PAG Ltd. UK**  
565 Kingston Road  
London SW20 8SA

E sales@paguk.com  
T +44 (0)20 8543 3131  
www.paguk.com

© FEB 2020 PAG Ltd. PAG is the trademark of PAG Ltd.  
PAG reserves the right to change the specifications contained herein without notice.