
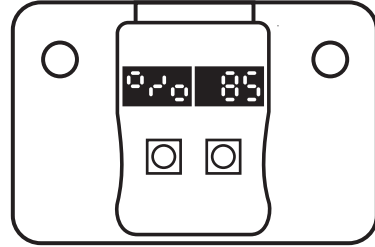


Gold Mount Battery Reader / Model 9647A

Gold Mount Battery rear:

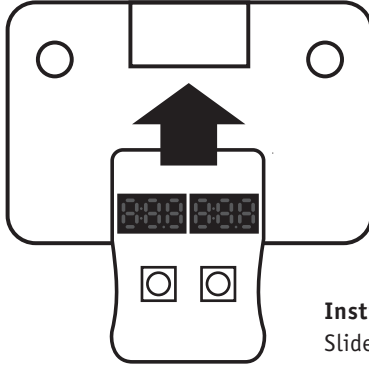

Instructions for use:

Slide the Reader to the rear battery contacts and data will automatically display. The menu category is displayed on the left, and the reading for the battery is displayed on the right. A single press of the button on the right moves selection onto the next category; the left button moves it back to the previous category.

The menu sequence is as follows:

1. Percentage State of Charge:



2. Available Capacity in Ampere-Hours:



3. Cell Temperature:



4. Number of Charge/Discharge Cycles:



5. Voltage (Potential Difference):



6. Full Capacity in Ampere-Hours:



7. Date of Birth/Manufacture (Month/Year):



8. Software Version (for the battery):



9. Serial Number:



Compatibility

The PAGlink Gold Mount Battery Reader is designed for use with PAGlink Gold Mount Battery Models 9306 PL94T and 9313 PL150T. It is compatible with the latest non-linking PAG Gold Mount batteries, Models 9310A L96e and 9305A L96T. It is compatible with Anton/Bauer Gold Mount batteries.

Sleep Mode

Pressing both menu buttons simultaneously, when in any menu item, will put the battery into 'sleep' mode. This mode reduces the rate of battery self-discharge and can be used for long-term battery storage or transport. To 'wake' the battery, simply press the battery display button.